
### LABA Installation Instructions Overview




#### WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.
- **Before beginning installation**, review our complete list of warnings by visiting www.saylite.com/warnings.

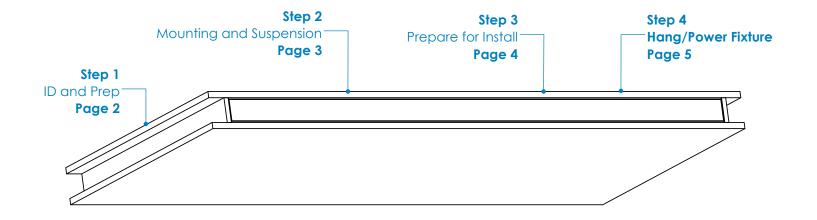

# LABA Installation Instructions Step 1 - Identification and Preparation



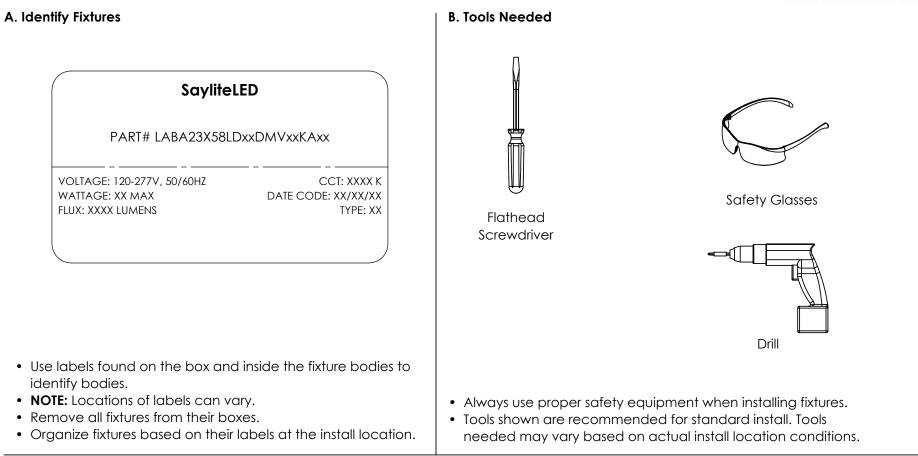

#### **Kitted Hardware**

- Saylite has provided the items listed here, with their Saylite part numbers listed. These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.

# LABA Installation Instructions Step 2 - Mounting and Suspension



Mounting

#### Drywall or other hard surfaces - HC 801 Hanging Kit\*


- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.

Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

#### **Suspension Locations**


**X** = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

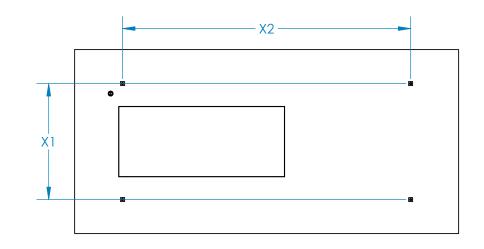

## LABA Installation Instructions Step 3 - Prepare for Installation




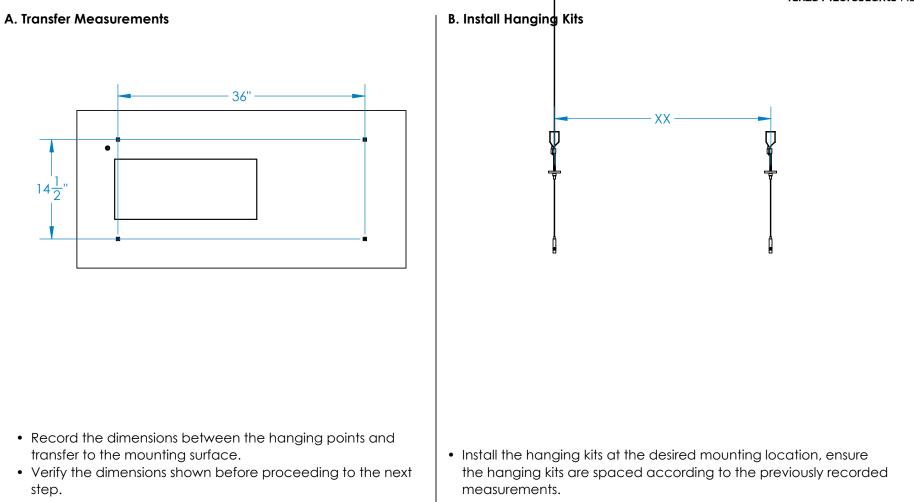


## LABA Installation Instructions Step 4 - Hang and Power the Fixture



### A. Hang the Fixture



### B. Power the Fixture



WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

	<ul> <li>Wire fixtures to the incoming power supply using the provided quick disconnect clip as shown.</li> </ul>
	<ul> <li>For dimming option, refer to wiring legend above.</li> </ul>
<ul> <li>Install the threaded ends of the hanging cable to the studs of the fixture.</li> </ul>	<ul> <li>Use UL approved connectors only. Follow all local, state and national codes.</li> </ul>
• Use pliers or equivalent to tighten the threaded ends 1/4 turn.	<ul> <li>Installation is now complete.</li> </ul>