

Polygon Series

The Pentagon

The Polygon series offers an interesting opportunity to create a statement in your space with a hanging luminaire system. Choose from multiple standard patterns or develop your own custom pattern of L23 fixtures.

The Pentagon has specially designed brackets that allow for construction of this symmetric pentagon configuration. The popular L23 fixtures provide bright, white and energy efficient illumination with up and down lighting options. Revolutionize lighting in your space with an innovative and refreshing fixture.

CONSTRUCTION


Brackets are laser cut, fabricated, and robot-welded from 14-gauge powder coated cold-rolled steel with custom colors available.

OPTIONS

14W emergency battery backup integrated in all fixtures 4 foot long and above.

FLAIR

Customize the color of your brackets and/or end caps to add flair to your unique hanging luminaire system. Consult factory for more information.

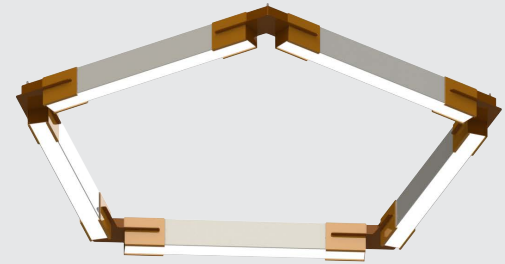

SYSTEM DIMENSIONS

24" L23 fixture: 57" D x 3.23" H

48" L23 fixture: 92" D x 3.23" H

72" L23 fixture: 133" D x 3.23" H

96" L23 fixture: 174" D x 3.23" H

SPECIFICATIONS

- 4 standard fixture lengths – 24", 48", 72", and 96"
- Customizable bracket, fixture, and end cap colors available
- Pendant mount for multiple ceiling types
- Many lumen package / wattage options via programmable drivers
- Multiple Kelvin temperature options (3000K, 3500K, 4000K, 5000K)
- Emergency battery backup options available (remote only)
- CRI >80 (90 available)
- >50,000 hrs of L70 LED life
- Rated for dry and damp locations
- 0 - 10 Volt dimmable 120-277V (120V ELV/TRIAC avail)
- Power factor >0.90
- 5 year warranty



ORDERING GUIDE

Factory at your fingertips. Fill in the blanks to create your part number or create a custom configuration.

Sample Part Number: PLY23-P-FR-57-LT-U60-D100-DMV-WH-30K-RD-EM14-PT

SERIES	MOUNTING	DIFFUSER	DIAMETER ¹	GEAR	WATTAGE & LUMENS* ²
PLY23	P Pendant	FR Frosted	57 D = 57"	LT	Up & Down U60D100 Uplight 60W & 6900 Lumens, Downlight 100W & 11500 Lumens
					Down Only D100 Downlight 100W & 11500 Lumens
					Up & Down U120D200 Uplight 120W & 13800 Lumens, Downlight 200W & 23000 Lumens
					Down Only D200 Downlight 200W & 23000 Lumens
					Up & Down U180D300 Uplight 180W & 20700 Lumens, Downlight 300W & 34500 Lumens
					Down Only D300 Downlight 300W & 34500 Lumens
			92 D = 92"	LT	Up & Down U240D400 Uplight 240W & 27600 Lumens, Downlight 400W & 46000 Lumens
					Down Only D400 Downlight 400W & 46000 Lumens
					Up & Down U60D100 Uplight 60W & 6900 Lumens, Downlight 100W & 11500 Lumens
					Down Only D100 Downlight 100W & 11500 Lumens
					Up & Down U120D200 Uplight 120W & 13800 Lumens, Downlight 200W & 23000 Lumens
					Down Only D200 Downlight 200W & 23000 Lumens
133 D = 133"	LT	Up & Down U180D300 Uplight 180W & 20700 Lumens, Downlight 300W & 34500 Lumens			
		Down Only D300 Downlight 300W & 34500 Lumens			
		Up & Down U240D400 Uplight 240W & 27600 Lumens, Downlight 400W & 46000 Lumens			
		Down Only D400 Downlight 400W & 46000 Lumens			
		Up & Down U60D100 Uplight 60W & 6900 Lumens, Downlight 100W & 11500 Lumens			
		Down Only D100 Downlight 100W & 11500 Lumens			
174 D = 174"	LT	Up & Down U60D100 Uplight 60W & 6900 Lumens, Downlight 100W & 11500 Lumens			
		Down Only D100 Downlight 100W & 11500 Lumens			
		Up & Down U120D200 Uplight 120W & 13800 Lumens, Downlight 200W & 23000 Lumens			
		Down Only D200 Downlight 200W & 23000 Lumens			
		Up & Down U180D300 Uplight 180W & 20700 Lumens, Downlight 300W & 34500 Lumens			
		Down Only D300 Downlight 300W & 34500 Lumens			

DRIVER	FINISH ³	CCT ⁴	FLAIR ⁵	OPTIONS	
DMV 0-10V Dimming	WH White	30K 3000K/>80 CRI	RD Red	EM14 14W Emergency battery backup (integrated in fixtures 4 ft and up)	CONFIGURATION -PT Pentagon
	BK Black	35K 3500K/>80 CRI	BL Blue		
	SL Silver	40K 4000K/>80 CRI	BK Matte Black		
DMV11 0-10V Dimming Separate drivers for uplight and downlight	WH White	50K 5000K/>80 CRI	RD Red	EM14 14W Emergency battery backup (integrated in fixtures 4 ft and up)	CONFIGURATION -PT Pentagon
	BK Black	35K 3500K/>80 CRI	BL Blue		
	SL Silver	40K 4000K/>80 CRI	BK Matte Black		

- Note:
- Pentagon configurations are measured by an overall system diameter.
 - Values shown are totals per system, minimum individual fixture wattage is 10W. Minimum 5W per fixture foot uplight and downlight. Maximum 7W per fixture foot uplight and 14W per fixture foot downlight. For uplight only, change the 'D' to 'U' in the Down Only sections. Power feed cable is 18AWG, power drop is required every 800W or 48 feet for 0-10V dimming, whichever comes first. EM not available in fixtures 4' and shorter if there is uplight and downlight.
 - Consult product catalog for more finish color options.
 - Consult factory for 90 CRI options.
 - NEW!** Personalize your lighting even further by choosing a standard flair color for your brackets, at no additional cost, from the guide on the following page.
 - HC912 hanging kit comes standard with PLY23 fixtures. Consult factory for other options.
- *Programmable LED drivers allow custom configured wattages and corresponding lumens.
- We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

CATALOG#: _____
PROJECT: _____
TYPE: _____


STANDARD FLAIR BRACKET COLORS AND FINISHES



Gloss Black
(GB)



Matte Black
(BK)




Matte Silver
(SL)




Statuary Bronze
(BZ)



Glimmer (Iron)
(IR)




Safety Yellow
(YL)



Safety Orange
(OR)



Red
(RD)




Fire Engine Red
(FR)




Blue
(BL)

NOTE: Factory offers any Tiger Drylac RAL finish, contact Saylite for more information. Consult factory to special order custom 'real wood' finishes.

PRODUCT DIMENSIONS

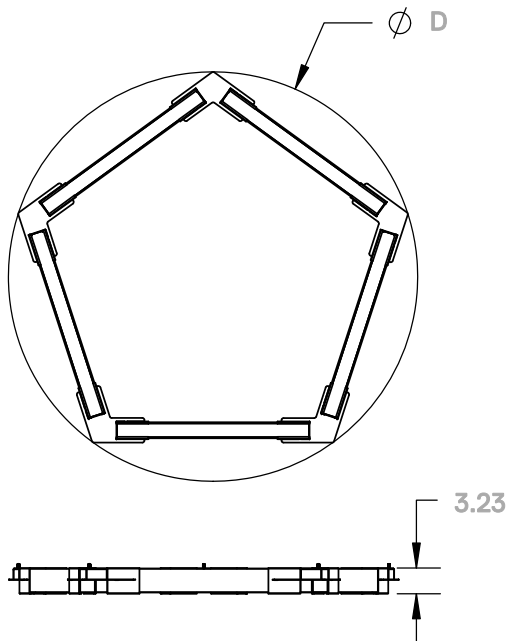

HANGING KIT ATTACHMENT POINTS

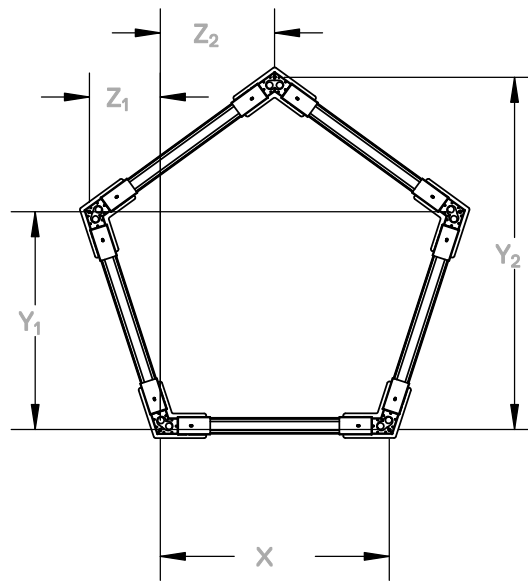

Sample Part Number	Nominal Diameter	X	Y ₁	Z ₁	Y ₂	Z ₂
PLY23PFR57LTU60D100DMVWH30KRD-PT	Ø = 57 in.	28.625 in.	27.25 in.	8.875 in.	44 in.	14.25 in.
PLY23PFR92LTU120D200DMVWH30KRD-PT	Ø = 92 in.	52.625 in.	50 in.	16.25 in.	81 in.	26.375 in.
PLY23PFR133LTU180D300DMVWH30KRD-PT	Ø = 133 in.	76.625 in.	72.875 in.	23.75 in.	118 in.	38.25 in.
PLY23PFR174LTU240D400DMVWH30KRD-PT	Ø = 174 in.	100.625 in.	95.75 in.	31 in.	154.875 in.	50.375 in.

Values shown in table rounded to nearest 1/8th of an inch.

BRACKET DIMENSIONS

