



JOB NAME:

CAT#:

TYPE:

ILLUMINATION

- Long lasting, efficient ultra bright white LED lamps heads
- 1.0 watt (8 LEDs x 0.125W) per head
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-center spacing
- Long life, energy efficient red or green LED exit sign illumination

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.



MOUNTING

- EZ-snap mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high impact resistant, thermoplastic in white or black finish
- EZ snap-out chevron directional indicators

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for 5 years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed for damp locations (0°C-40°C)
- Certified to CEC under Title 20 regulations

DIMENSIONS

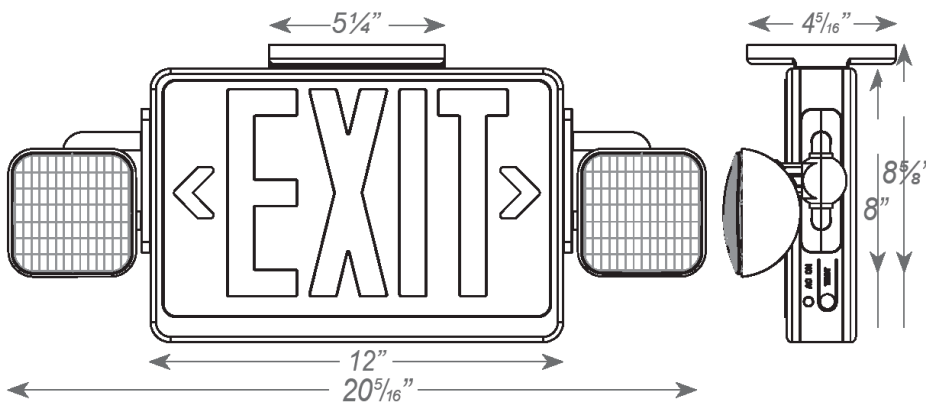

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LEDCXTEU 2 R W RC

LEDCXTEU

1. MODEL	2. # OF FACES	3. LETTER COLOR	4. HOUSING COLOR	5. REMOTE CAPACITY (O)¹	6. OUTPUT (O)¹
LEDCXTEU	2 Universal/ Single/Double Face	R Red G Green	W White B Black	RC Remote Capacity	HL High Lumen

7. LAMP HEADS (O)¹	8. DIAGNOSTICS (O)¹	9. WORDING (O)¹
NH No Lamp Heads	SDT Self-Diagnostics	CUSTOM Custom Wording

Notes:
¹(O) is optional
Dimensions and specifications subject to change without notice.

