



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

A shallow economy designed 7" wraparound LED luminaire available in either two or four foot lengths that is maintenance free and has a low initial cost. This series also delivers excellent brightness control and is suitable for individual or continuous run installations.



Completely die formed from heavy gauge cold rolled steel. A crystal clear diffuser extruded from 100% virgin acrylic that will maintain its color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards. The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glare-free, diffused light.



FEATURES & BENEFITS

- Low initial cost, maintenance free, excellent brightness control
- Design embossed ends are locked and secures to the housing
- Suitable for individual or continuous run installations
- Min CRI 82
- _cETL_{us} Listed for damp locations

DIMENSIONS

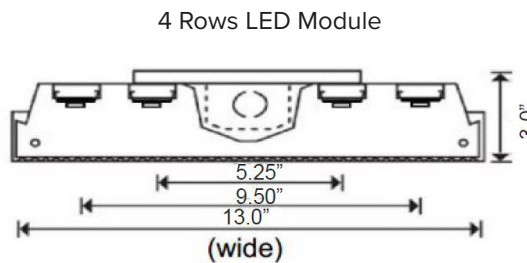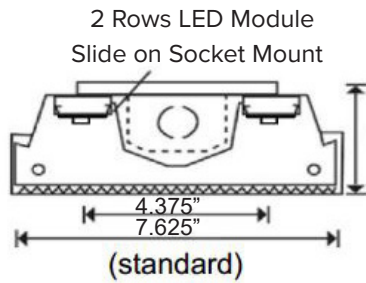



JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: 769 24 LED 23 DMV 30 EM WP

769

LED

1. SERIES	2. SIZE	3. WIDTH	4. GEAR	5. WATTAGE/LUMENS	6. DRIVER	7. LENS
769	24 24" 48 48"	(Blank) Standard W Wide	LED	24" 15 15 Watts 1950 lumens 20 20 Watts 2600 lumens 24" wide 25 25 Watts 3250 lumens 33 33 Watts 4290 lumens 48" 15 15 Watts 1950 lumens 20 20 Watts 2600 lumens 25 25 Watts 3250 lumens 30 30 Watts 3900 lumens 48"wide 35 35 Watts 4550 lumens 40 40 Watts 5200 lumens 45 45 Watts 5850 lumens 50 50 Watts 6500 lumens 54 54 Watts 7020 lumens	DMV 120-277V Multivolt 0-10V Dimmable Consult factory for Step Dimming Options	(Blank) Clear Prismatic SW Smooth White

8. COLOR TEMP	9. EM	10. CORD
30 3000K	EM 10W ~1200 Lumen Battery backup	WP 6' Whip 3 Wire
35 3500K	EM7 7W ~840 Lumen Battery backup	
40 4000K	EM5 5W ~600 Lumen Battery backup	
50 5000K		

*Cord & Whip Ordering Chart (Add to End of Fixture Part Number)						
Part No.	# of Wires	Length	End Fitting	Finish	Voltage	Amps (TL Only)
WP - Whip CS - Cordset	(Blank) 3 Wire 4 - 4 Wire 5 - 5 Wire 6 - 6 Wire	(Blank) 6 feet 8 - 8 feet 10 - 10 feet 12 - 12 feet 15 - 15 feet	(Blank) No Plug P* - Standard Plug TL* - Twist Lock	BK - Black WH - White	(Blank) 120-277V 120 - 120V 277 - 277V 347 - 347V 480 - 480V	15 - 15 Amps 20 - 20 Amps

NOTE: Values shown are typical or recorded under standardized conditions at 25°C. Actual performance may vary based on environment or application. Specifications are subject to change without notice. We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.

